



BENEFITS OF IDIS SUPER FISHEYE CAMERA

IDIS HQ
 IDIS Tower, 344 Pangyo-ro Bundang-gu, Seongnam-si Gyeonggi-do, 13493 Republic of Korea
 T +82 (0) 31 723 5400
 F +82 (0) 31 723 5100
 E sales@idisglobal.com

IDIS America
 801 Hammond Street Suite 200 Coppel, TX 75019 U.S.A.
 T +1 469 444 6538
 F +1 469 464 4449
 E sales_americas@idisglobal.com

IDIS Europe
 1000 Great West Road Brentford, Middlesex TW8 9HH The United Kingdom
 T +44 (0) 203 657 5678
 F +44 (0) 203 697 9360
 E uksales@idisglobal.com

IDIS Middle East
 P.O. Box 341037 D-308, DSO HQ Bldg Dubai Silicon Oasis Dubai, U.A.E.
 T +971 4 501 5434
 F +971 4 501 5436
 E sales_mena@idisglobal.com

IDIS Benelux
 De Slof 9 5107 RH Dongen The Netherlands
 T +31 (0) 162 387247
 F +31 (0) 162 311915
 E sales@bnl.idisglobal.com

IDIS One Solution. One Company.

IDIS and identifying product names and numbers herein are registered trademarks of IDIS Co., Ltd. All non-IDIS brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status, and/or specifications are subject to change without notice. Copyright © IDIS Co., Ltd. All rights reserved.

For more information, please visit www.idisglobal.com

Cost Savings on Equipment and Installation



Cover a wider area with a single 360° camera

By providing complete field of view coverage, this can significantly reduce the number of cameras required to cover a particular area, meaning less equipment costs and lower installation fees.

Dual Side Dewarping Solution



Dewarping on-board the camera and on client PCs, mobile devices, or NVRs without a PC

IDIS Super Fisheyes support dewarping on the camera as well as on client applications (including smart phones). Network video recorder (NVR) dewarping is an ideal choice for a wide range of applications, such as retail shops, restaurants, and supermarkets. This offers customers a wide choice of recording platforms and video management software (VMS) options.




IR LED

The IDIS Super Fisheye has built-in IR LEDs (6ea), ensuring up to 15m / 49.2ft visibility at night. It also allows connection of an external illuminator and provides better night vision.
 (DC-Y3C14WRX, DC-Y8C13WRX, DC-Y8C13RX, DC-Y6S13RX)



Communication

Speakers connected to the built-in microphone of the camera can communicate with equipment, such as a microphone or speaker connected to an NVR, VMS, or mobile device, so two-way communication is possible.



Identify Any Point of Interest with IDIS Center

Provides an overview while maintaining details at the same time
 The IDIS Super Fisheye can simultaneously monitor and analyze up to 64 points of interest without any blind spots. The viewer is able to keep track of suspicious objects without missing critical information.



Robust, Vandal Resistant, and Weatherproof

Certified with the highest-class durability, the IDIS Super Fisheye delivers stable surveillance even in the toughest of environments.
 (IP67 on DC-Y3C14WRX, DC-Y8C13WRX, DC-Y1514W only. Vandal resistant and weatherproof on "W" models only.)



High Definition Images

High resolution is required to capture a large area in detail. 12 or 5 megapixel (MP) image sensors enable clear identification from center to edge and from wall to wall, delivering very clear images.




Storage Savings with IDIS Intelligent Codec

Delivers up to 90% savings on storage and bandwidth, providing faster and better searching of clearer images
 See up to 90% storage savings via IDIS Intelligent Codec with Motion Adaptive Transmission (MAT). You get faster and smoother searches, which minimize distortion while you review complex scenes.



True WDR (120dB)

Easy to recognize who and what is there in every environment
 Supports true wide dynamic range (WDR) up to 120dB and provides clear images in various scenes even under difficult lighting conditions.



Smart UX Controls v2.0

Groundbreaking agility, ease, and accuracy
 IDIS "Quick Controls" consist of "Quick Save," "Quick Find," "Quick Dewarping," "Quick Zoom," and "Quick PTZ." These revolutionary controls allow operators to dewarp any point of interest and even pan-tilt-zoom in a dewarping state.



Quick and Easy to Install

Easy installation with DirectIP NVRs
 The DirectIP true plug-and-play functionality and automatic network detection and device setup result in a system that is quick, easy, and cost effective to install.



Heat maps

Visualize visitor footfall and behavior
 Highlight where people spend time and what they interact with. This is utilized to determine the best location where exposure needs to be maximized, such as new product zones or areas with sluggish sales. It can also be used to select the best locations for advertisements and promotional materials.
 (DC-Y3C14WRX, DC-Y8C13WRX, DC-Y8C13RX, DC-Y6S13RX)

QUICK AND EASY TO INSTALL

Easy Installation with DirectIP NVRs
 Using IDIS NVRs, customers can benefit from fast and cost-effective installation and an optimized user-friendly interface. DirectIP enables easy and rapid installation for installers and end users and ensures the rich connectivity of IDIS products. This IDIS flagship offering takes a revolutionary approach to surveillance - one that is truly plug-and-play, single-source, and highly affordable - comprising a range of cameras, NVRs, and monitors. The DirectIP solution offers 4K Ultra High Definition (UHD) and support for H.265 with IDIS Intelligent Codec.



IDIS DUAL SIDE DEWARPING SOLUTION

On-Board Camera and Client Side (Mobile Devices, Client PCs, or NVRs Without a PC)
 Image dewarping is done either on-board the camera or on the client side, including mobile phones, client PCs, or an NVR without a PC. NVR dewarping is an ideal choice for a wide range of applications, such as retail shops, restaurants, and supermarkets.



AWARD-WINNING, GROUNDBREAKING AGILITY, EASE OF USE, AND ACCURACY

Smart UX Controls v2.0
 Graphic Processing Unit (GPU) Assisted Super Smooth ePTZ Control



To combat the challenges of IP PTZ controls, IDIS has developed the game changing Smart UX Controls software to provide unparalleled accuracy and ease of use, featuring intuitive "Rubberband" style control, creating an experience unlike any other available on the market.

These smooth and seamless controls allow users to easily follow moving objects in real-time with groundbreaking accuracy by panning images at different speeds and in different directions literally without lifting a finger. IDIS has also gone one step further to lessen the pain points associated with traditional PTZ controls and introduced "Quick Controls" functions to allow for simple and fast operation utilizing a CTRL button and mouse combination (left/right/wheel click).

IDIS "Quick Controls" consist of "Quick Save," "Quick Find," "Quick Dewarping," "Quick Zoom," and "Quick PTZ." These revolutionary controls allow operators to dewarp any point of interest and even pan-tilt-zoom in a dewarping state.

"Quick Find" enables users to drag a saved image to a desired camera channel and view recorded video from the time of saving quickly and with little effort. "Quick Dewarping" allows operators to use the CTRL button with a combination of left, right, and wheel mouse clicks to enable ePTZ, image reset, and zoom in and out functionality to significantly speed up and simplify operation.

UP TO 90% STORAGE SAVINGS


Delivers Up to 90% Savings on Storage and Bandwidth, Providing Faster and Better Searching of Clearer Images

The IDIS 12MP Super Fisheye supports H.265 and IDIS Intelligent Codec.

IDIS Intelligent Codec is advanced compression technology that dramatically enhances IDIS's complete H.265 range of IP cameras and NVRs, which already deliver up to 50% bit rate reduction savings on storage space and network bandwidth. IDIS Intelligent Codec delivers up to 30% bit rate reduction on top of H.265, achieving a total of 65% reduction for users. By leveraging IDIS Motion Adaptive Transmission (MAT) technology — which reduces the bit rate during live surveillance periods without movement — IDIS delivers a further reduction. From an H.264 baseline, IDIS Intelligent Codec plus MAT delivers a total savings of up to 90%, depending on scene and resolution.

IDIS Intelligent Codec makes the complete IDIS H.265 range cost-effective, ensuring IDIS's signature low total cost of ownership. The implementation of dual codecs (H.264/H.265) across IDIS's entire H.265 range (including cameras, NVRs, and mobile apps) allows users to use H.264 for live monitoring while utilizing H.265 for recording, reducing storage requirements. This allows users of IDIS technology to enjoy the full benefits of IDIS Intelligent Codec and ensures the IDIS H.265 range is backward compatible with prior IDIS technology, fulfilling the IDIS promise of futureproof video surveillance.


IDIS Intelligent Codec

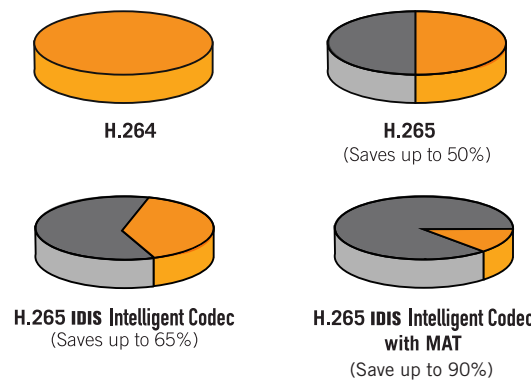

SMART FAILOVER


Seamless Recording Even After Network Failure

When the NVR and IP camera are disconnected, the camera's SD card instantly begins recording and automatically transfers the data to the NVR after recovery, leaving no incident unrecorded.

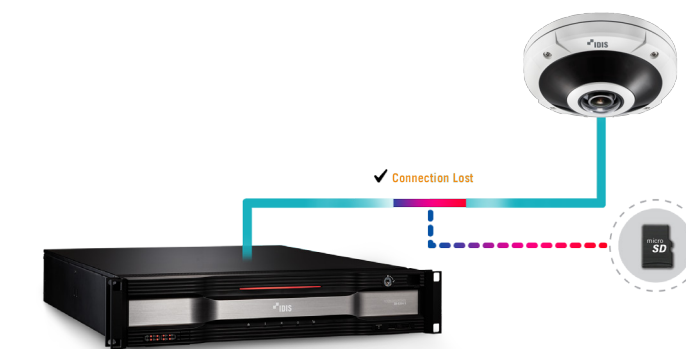

Seamless Recording

When the NVR and IP camera are disconnected, the camera's SD card instantly begins recording and automatically transfers the data to the NVR after recovery, leaving no incident unrecorded.



24 Hours Smart Save

A 32GB SD card will record at a pre-configured profile until 50% of the card's capacity is used, after which the IP camera automatically controls recording profiles to guarantee recording.



IDIS SUPER FISHEYE 12MP/5MP

SUPER DEWARPING

Dual Side Dewarping · Mobile Dewarping · Smooth Dewarping

12MP IR 360° DOME FISHEYE CAMERA

DC-Y3C14WRX
 DC-Y8C13WRX (Panomorph)
 DC-Y8C13RX (Panomorph)

5MP 360° DOME FISHEYE CAMERA

DC-Y6S13RX (Compact)
 DC-Y1514(W)

IDIS One Solution. One Company.



	12MP Vandal Resistant IR Fisheye Camera DC-Y3C14WRX	12MP Vandal Resistant Panomorph IR Fisheye Camera DC-Y8C13WRX	12MP Panomorph IR Fisheye Camera DC-Y8C13RX	5MP IR Fisheye Camera DC-Y6513RX	5MP Vandal Resistant Fisheye Camera DC-Y1514(W)																																																												
KEY FEATURE																																																																	
	<ul style="list-style-type: none"> Easy installation with DirectIP NVR 12MP Sensor / 9.4MP (3200 x 2944) resolution Fixed-focal lens (f=1.98mm) micro SD/SDHC/SDXC, Smart Failover (Up to 256GB) Two-way audio Alarm in / out IK10 / IP67 supports PoE (IEEE 802.3af Class 3), 12V DC Day and night (ICR) True wide dynamic range (WDR) IR LED (Distance: 15m / 49.2ft) Various viewing composition, 6 dewarping view modes Supports ONVIF 	<ul style="list-style-type: none"> Easy installation with DirectIP NVR 12MP Sensor / 9.4MP (3200 x 2944) resolution Fixed-focal lens (f=1.2mm) micro SD/SDHC/SDXC, Smart Failover (Up to 256GB) Two-way audio Alarm in / out IK10 / IP67 supports PoE (IEEE 802.3af Class 3), 12V DC Day and night (ICR) True wide dynamic range (WDR) IR LED (Distance: 15m / 49.2ft) Various viewing composition, 6 dewarping view modes Supports ONVIF 	<ul style="list-style-type: none"> Easy installation with DirectIP NVR 12MP Sensor / 9.4MP (3200 x 2944) resolution Fixed-focal lens (f=1.2mm) micro SD/SDHC/SDXC, Smart Failover (Up to 256GB) Two-way audio Alarm in / out PoE (IEEE 802.3af Class 3), 12V DC Day and night (ICR) True wide dynamic range (WDR) IR LED (Distance: 15m / 49.2ft) Various viewing composition, 6 dewarping view modes Supports ONVIF 	<ul style="list-style-type: none"> Easy installation with DirectIP NVR 5MP (2560 x 2048) resolution Fixed-focal lens (f=1.5mm) micro SD/SDHC/SDXC, Smart Failover (Up to 256GB) Two-way audio Alarm in / out PoE (IEEE 802.3af Class 3), 12V DC Day and night (ICR) True wide dynamic range (WDR) IR LED (Distance: 15m / 49.2ft) Various viewing composition, 6 dewarping view modes Supports ONVIF 	<ul style="list-style-type: none"> Easy installation with DirectIP NVR 5MP (2560 x 2048) resolution Fixed-focal lens (f = 1.45mm) micro SD/SDHC/SDXC, Smart Failover(Up to 256GB) Two-way audio Alarm in / out Vandal proof / IP66 supports (DC-Y1514W) PoE (IEEE 802.3af Class 3), 12VDC Day and night (ICR) Various viewing 6 dewarping view modes Supports ONVIF 																																																												
VIDEO	Image Sensor: 1/1.7" 12MP CMOS Max. Resolution: 3200 x 2944 Scanning Mode: Progressive Scan Lens Type: Fixed-focal Focal Length: f=1.98mm Aperture: F2.8 Iris Control: Fixed Iris Angular Field of View: 180(H) x 168(V) x 180(D) Pan / Tilt Range: - Min. Illumination: Color : 0.2 Lux @ F2.8, B/W : 0 Lux(IR LED On) Dynamic Range: 120 dB (True WDR) Electronic Shutter Speed: Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1-1/5, 1/7.5, 1/15) Day and Night: IR Cut Filter with Auto Switch IR Distance (LEDs): 15m(6ea) Image Setting: Configurable Exposure, White Balance, Sharpness Digital Noise Reduction: Configurable 2DNR/3DNR Backlight Compensation: On / Off / HSBLC Image Stabilizer: - Privacy Masking: 8 Zones Intelligent Video: Video Motion Detection, Active Tampering Alarm, Trip Zone, Heatmap Viewing Composition: 10, 1P, 1P2R, 2P, 4R, 107R Video Out: -	Image Sensor: 1/1.7" 12MP CMOS Max. Resolution: 3200 x 2944 Scanning Mode: Progressive Scan Lens Type: Fixed-focal Focal Length: f=1.2mm Aperture: F2.2 Iris Control: Fixed Iris Angular Field of View: 180° (H) x 180° (V) x 180° (D) Pan / Tilt Range: - Min. Illumination: Color : 0.2 Lux @ F2.2, B/W : 0 Lux(IR LED On) Dynamic Range: 120 dB (True WDR) Electronic Shutter Speed: Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1-1/5, 1/7.5, 1/15) Day and Night: IR Cut Filter with Auto Switch IR Distance (LEDs): 15m(6ea) Image Setting: Configurable Exposure, White Balance, Sharpness Digital Noise Reduction: Configurable 2DNR/3DNR Backlight Compensation: On / Off / HSBLC Image Stabilizer: - Privacy Masking: 8 Zones Intelligent Video: Video Motion Detection, Active Tampering Alarm, Trip Zone, Heatmap Viewing Composition: 10, 1P, 1P2R, 2P, 4R, 107R Video Out: -	Image Sensor: 1/1.7" 12MP CMOS Max. Resolution: 3200 x 2944 Scanning Mode: Progressive Scan Lens Type: Fixed-focal Focal Length: f=1.2mm Aperture: F2.2 Iris Control: Fixed Iris Angular Field of View: 180° (H) x 180° (V) x 180° (D) Pan / Tilt Range: - Min. Illumination: Color : 0.2 Lux @ F2.2, B/W : 0 Lux(IR LED On) Dynamic Range: 120 dB (True WDR) Electronic Shutter Speed: Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1-1/5, 1/7.5, 1/15) Day and Night: IR Cut Filter with Auto Switch IR Distance (LEDs): 15m(6ea) Image Setting: Configurable Exposure, White Balance, Sharpness Digital Noise Reduction: Configurable 2DNR/3DNR Backlight Compensation: On / Off / HSBLC Image Stabilizer: - Privacy Masking: 8 Zones Intelligent Video: Video Motion Detection, Active Tampering Alarm, Trip Zone, Heatmap Viewing Composition: 10, 1P, 1P2R, 2P, 4R, 107R Video Out: -	Image Sensor: 1/2" CMOS Max. Resolution: 2560 x 2048 Scanning Mode: Progressive Scan Lens Type: Fixed-focal Focal Length: f=1.5mm Aperture: F1.8 Iris Control: Fixed Iris Angular Field of View: 180° (H) x 180° (V) x 180° (D) Pan / Tilt Range: - Min. Illumination: Color : 0.5 Lux @ F1.8, B/W : 0 Lux (IR LED On) Dynamic Range: 120 dB (True WDR) Electronic Shutter Speed: Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1-1/5, 1/7.5, 1/15) Day and Night: IR Cut Filter with Auto Switch IR Distance (LEDs): - Image Setting: Configurable Exposure, White Balance, Sharpness Digital Noise Reduction: Configurable 2DNR/3DNR Backlight Compensation: On / Off / HSBLC Image Stabilizer: - Privacy Masking: 8 Zones Intelligent Video: Video Motion Detection, Active Tampering Alarm, Trip Zone, Heatmap Viewing Composition: 10, 1P, 1P2R, 2P, 4R, 107R Video Out: -	Image Sensor: 1/1.8" CMOS Max. Resolution: 2560 x 2048 Scanning Mode: Progressive Scan Lens Type: Fixed-focal Focal Length: f=1.45mm Aperture: F2.2 Iris Control: Fixed Iris Angular Field of View: 180° (H) x 180° (V) x 180° (D) Pan / Tilt Range: - Min. Illumination: Color : 0.8 Lux @ F2.2, B/W: 0.03 Lux @ F2.2 Dynamic Range: more than 70 dB Electronic Shutter Speed: Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1/7.5, 1/15) Day and Night: IR Cut Filter with Auto Switch IR Distance (LEDs): - Image Setting: Configurable Exposure, White Balance, Sharpness Digital Noise Reduction: Configurable 2DNR/3DNR Backlight Compensation: On / Off / HSBLC Image Stabilizer: - Privacy Masking: 16 Zones Intelligent Video: Video Motion Detection, Active Tampering Alarm, Trip Zone, Heatmap Viewing Composition: 10, 1P, 1P2R, 2P, 4R, 107R Video Out: -																																																												
NETWORK	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>H.265, H.264 (MP), M-JPEG</td> <td>H.265, H.264 (MP), M-JPEG</td> </tr> <tr> <td>Supported</td> <td>Supported</td> </tr> <tr> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> </tr> <tr> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG	Supported	Supported	H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	Yes	Yes	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>H.265, H.264 (MP), M-JPEG</td> <td>H.265, H.264 (MP), M-JPEG</td> </tr> <tr> <td>Supported</td> <td>Supported</td> </tr> <tr> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> </tr> <tr> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG	Supported	Supported	H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	Yes	Yes	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>H.265, H.264 (MP), M-JPEG</td> <td>H.265, H.264 (MP), M-JPEG</td> </tr> <tr> <td>Supported</td> <td>Supported</td> </tr> <tr> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> </tr> <tr> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG	Supported	Supported	H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	Yes	Yes	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>H.265, H.264 (MP), M-JPEG</td> <td>H.265, H.264 (MP), M-JPEG</td> </tr> <tr> <td>Supported</td> <td>Supported</td> </tr> <tr> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>ADPCM 16K, G.726, G.711 u-Law</td> <td>ADPCM 16K, G.726, G.711 u-Law</td> </tr> <tr> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG	Supported	Supported	H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR	ADPCM 16K, G.726, G.711 u-Law	ADPCM 16K, G.726, G.711 u-Law	Yes	Yes	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>H.265, H.264 (MP), M-JPEG</td> <td>H.265, H.264 (MP), M-JPEG</td> </tr> <tr> <td>Supported</td> <td>Supported</td> </tr> <tr> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>ADPCM 16K, G.726, G.711 u-Law</td> <td>ADPCM 16K, G.726, G.711 u-Law</td> </tr> <tr> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG	Supported	Supported	H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR	ADPCM 16K, G.726, G.711 u-Law	ADPCM 16K, G.726, G.711 u-Law	Yes	Yes
DirectIP Mode	Compatibility Mode																																																																
H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG																																																																
Supported	Supported																																																																
H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR																																																																
ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law																																																																
Yes	Yes																																																																
DirectIP Mode	Compatibility Mode																																																																
H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG																																																																
Supported	Supported																																																																
H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR																																																																
ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law																																																																
Yes	Yes																																																																
DirectIP Mode	Compatibility Mode																																																																
H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG																																																																
Supported	Supported																																																																
H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR																																																																
ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law																																																																
Yes	Yes																																																																
DirectIP Mode	Compatibility Mode																																																																
H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG																																																																
Supported	Supported																																																																
H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR																																																																
ADPCM 16K, G.726, G.711 u-Law	ADPCM 16K, G.726, G.711 u-Law																																																																
Yes	Yes																																																																
DirectIP Mode	Compatibility Mode																																																																
H.265, H.264 (MP), M-JPEG	H.265, H.264 (MP), M-JPEG																																																																
Supported	Supported																																																																
H.264 - CBR / VBR, H.265 - CBR / VBR	H.264 - CBR / VBR, H.265 - CBR / VBR																																																																
ADPCM 16K, G.726, G.711 u-Law	ADPCM 16K, G.726, G.711 u-Law																																																																
Yes	Yes																																																																
ALARM AND EVENT	Trigger Event: Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone Event Notification: Remote S/W, Email (With Image) Audio In / Out: Line-in 1ea + Internal Mic 1ea / Line-out 1ea Alarm In / Out: Input 1ea / Output 2ea	Trigger Event: Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone Event Notification: Remote S/W, Email (With Image) Audio In / Out: Line-in 1ea + Internal Mic 1ea / Line-out 1ea Alarm In / Out: Input 1ea / Output 2ea	Trigger Event: Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone Event Notification: Remote S/W, Email (With Image) Audio In / Out: Line-in 1ea + Internal Mic 1ea / Line-out 1ea Alarm In / Out: Input 1ea / Output 2ea	Trigger Event: Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone Event Notification: Remote S/W, Email (With Image) Audio In / Out: Line-in 1ea + Internal Mic 1ea / Line-out 1ea Alarm In / Out: Input 1ea / Output 1ea	Trigger Event: Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone Event Notification: Remote S/W, Email (With Image) Audio In / Out: Line-in 1ea + Internal Mic 1ea / Line-out 1ea Alarm In / Out: Input 1ea / Output 1ea																																																												
ENVIRONMENTAL	Vandal Resistance: IK10 Outdoor Ready: IP67 Operating Temperature: -10°C ~ +60°C (+14°F ~ +140°F) *Starting up at above 0°C (32°F) Operating Humidity: 0% ~ 90%	Vandal Resistance: IK10 Outdoor Ready: IP67 Operating Temperature: -10°C ~ +60°C (+14°F ~ +140°F) *Starting up at above 0°C (32°F) Operating Humidity: 0% ~ 90%	Vandal Resistance: IK10 Outdoor Ready: IP67 Operating Temperature: -10°C ~ +60°C (+14°F ~ +140°F) *Starting up at above 0°C (32°F) Operating Humidity: 0% ~ 90%	Vandal Resistance: IK10 Outdoor Ready: IP66 Operating Temperature: -10°C ~ +50°C (+14°F ~ +122°F) *Starting up at above 0°C (32°F) Operating Humidity: 0% ~ 90%	Vandal Resistance: IK10 Outdoor Ready: IP66 Operating Temperature: -10°C ~ +50°C (+14°F ~ +122°F) *Starting up at above 0°C (32°F) Operating Humidity: 0% ~ 90%																																																												
ELECTRICAL	Power Source: 12VDC, PoE (IEEE 802.3af Class 3) Power Consumption: 12V=, 1.1A, 12.6W, PoE, IEEE 802.3af(Class 3) Approvals: FCC, CE, KC	Power Source: 12VDC, PoE (IEEE 802.3af Class 3) Power Consumption: 12V=, 1A, 12W, PoE, IEEE 802.3af(Class 3), 12W Approvals: FCC, CE, KC	Power Source: 12VDC, PoE (IEEE 802.3af Class 3) Power Consumption: 12V=, 1A, 12W, PoE, IEEE 802.3af(Class 3), 12W Approvals: FCC, CE, KC	Power Source: 12VDC, PoE (IEEE 802.3af Class 3) Power Consumption: 12V=, 0.63A, 7.5W Approvals: FCC, CE, KC	Power Source: 12VDC, PoE (IEEE 802.3af Class 3) Power Consumption: 12V=, 0.63A, 7.5W Approvals: FCC, CE, KC																																																												
MECHANICAL	Dimensions: Ø155.0mm x 58.3mm (Ø6.10" x 2.29") Weight: 0.92 kg (2.03 lb)	Dimensions: Ø155.0mm x 58.3mm (Ø6.10" x 2.29") Weight: 0.84 kg (1.85 lb)	Dimensions: Ø155.0mm x 52.8mm (Ø6.10" x 2.08") Weight: 0.815 kg (1.79 lb)	Dimensions: Ø122 x 35.8mm (Ø4.80" x 1.40") Weight: 0.29 kg (0.63 lb)	Dimensions: DC-Y1514: Ø155mm x 43.0mm (Ø6.10" x 1.69") DC-Y1514W: Ø155.0mm x 48.3mm (Ø6.10" x 1.90") Weight: DC-Y1514: 0.58kg (1.28lb), DC-Y1514W: 0.59kg (1.31lb)																																																												

